

HOMOGENEOUS



Dolomite 3910* w/r 2500

NCS S 3020-Y20R



Carnelian Beige 3890 w/r 5330

NCS S 1510-Y30R



Pumice 3700* w/r 2650

NCS S 2000-N



Fossil 3710* w/r 3710

NCS S 3000-N



Flint 3720* w/r 3720

NCS S 5502-B



Blue Zircon 3760* w/r 8440

NCS S 4050-R80B




Sablee Beige 3900* w/r 2510

NCS S 4020-Y30R



Rose Quartz 3870* w/r 3870

NCS S 2005-Y50R

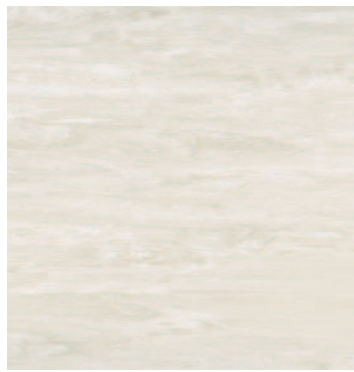

Porcelain 3880 w/r 3880

NCS S 1505-Y30R



Blue Nickel 3730 w/r 5350

NCS S 3010-R90B



Crystal Blue 3740* w/r 3740

NCS S 2030-R90B



Tanzanite Blue 3750 w/r 3750

NCS S 4040-R90B



Ironstone 3850 w/r 3850

NCS S 4040-Y70R



Citrine 3930 w/r 2660

NCS S 2030-Y20R



Opal 3920 w/r 2670

NCS S 1020-Y10R



Azure 3770 w/r 3770

NCS S 4020-R80B



Turquoise 3810* w/r 2610

NCS S 4010-B70G



Dark Sapphire 3820* w/r 2530

NCS S 5020-B30G



Ruby 3840 w/r 2560

NCS S 3060-Y80R



Sedona Pink 3860 w/r 9060

NCS S 3030-R



Amethyst 3780 w/r 3780

NCS S 3020-R50B



Peridot Green 3790 w/r 3790

NCS S 2010-B90G



Connemara Green 3800 w/r 3800

NCS S 3030-G20Y



Jade 3830 w/r 2520

NCS S 6020-G

GAUGE	COLOUR
2.0mm	24 - ex-stock
*1.5mm	10 - ex-stock

POLYFLOR XL PU

- BRE Green Guide to Specifications A+rating ENP 472
- Heavy-duty vinyl flooring featuring a marbleised decoration
- Polyurethane surface treatment

SPECIFICATION

1.5mm	2m x 27.5m = 55m ²	300 x 300mm	608 x 608mm	2360g/m ²
2.0mm	2m x 20m = 40m ²	4.5m ²	5.17m ²	3200g/m ²



GENERAL PERFORMANCE
EN 649 / EN ISO 10581
ASTM F1913
ASTM F1700

1.5mm			
2.0mm			



REACTION TO FIRE
EN 13501-1 Class Bfl-S1
ASTM E662 <450
ASTM E648 Class 1



SLIP RESISTANCE
EN 13893 Class DS
AS/NZS 4586 R9



ABRASION RESISTANCE
EN 660-2 Group M
EN ISO 10581 Type II



ELECTRICAL BEHAVIOUR
(body voltage)
EN 1815 <2kV
Classified as 'antistatic'



MARITIME USAGE †2.0mm
Marine Equipment Directive †
96/98/EC
SOLAS 74



VOC EMISSIONS
Indoor Air Comfort GOLD Eurofins certified product
AgBB VOC test: Pass
Floorscore certified (SCS Certificate Reg No: SCS-FS-02034)
Finnish M1 Classification: Pass
Swedish B.P.D (FLEC test): Best Class
GBCA/NZGBC Green Star IEQ-VOC: Compliant



CASTOR CHAIR
(continuous use)
Suitable



INDENTATION RESIDUAL
ASTM F970 (Modified)
Static load 750psi



ENVIRONMENTALLY PREFERABLE FLOORING
Polyflor XL PU achieves: - BRE Global Environmental A+ Rating (Certificate No: ENP 472) in major use areas such as education and healthcare
- GBCA/NZGBC Green Star: Green Tag LCA Rate certified with GreenRate Level A
XL PU is 100% recyclable and contains 25% recycled material.
Recyclable via the Recofloor scheme. Visit www.polyflor.com/environment



AGRÉMENT ASSURANCE
Polyflor XL PU has been independently assessed by the British Board of Agrément and product performance is assured for at least 10 years in recommended use areas. With proper maintenance, the appearance and colour will be retained during this period.



HYGIENE
This product has been independently tested and results demonstrate that it inhibits the growth of MRSA on the flooring. An effective cleaning regime is, however, the most important defence against infection.



APPLICATIONS
Polyflor XL PU is recommended for public, institutional and commercial buildings where ease of maintenance and long life under heavy traffic are required e.g. hospitals, schools, laboratories, offices etc.



Polyflor homogeneous PUR, heterogeneous PUR and Polysafe safety flooring ranges are compatible for use with the most commonly used alco-based hand gels. Some alco-based hand gels contain a high concentration of ethanol and to discuss their compatibility with XL PU, contact Polyflor Customer Technical Services. For information regarding handling and installation, adhesives, maintenance, applications and chemical resistance, consult Polyflor Customer Technical Services on +44 (0)161 767 1912, or email tech@polyflor.com.

POLYFLOR LTD. PO BOX 3 RADCLIFFE NEW ROAD WHITEFIELD MANCHESTER M45 7NR UK
UK SALES DIRECT: +44 (0)161 767 1122 UK SAMPLE REQUESTS: +44 (0)161 767 2551
EXPORT SALES DIRECT: +44 (0)161 767 1913 TECHNICAL SUPPORT: +44 (0)161 767 1912
RECEPTION: +44 (0)161 767 1111 UK FAX: +44 (0)161 767 1128
EXPORT FAX: +44 (0)161 767 1166 E-MAIL: INFO@POLYFLOR.COM
WEBSITE: WWW.POLYFLOR.COM

James Halstead
FLOORING



2011



POLYFLOR

XL

HOMOGENEOUS

PERFORMANCE AND PROPERTIES



GROUP

ARGENTINA - BUENOS AIRES

Dirección: Av Mitre 4461, Avellaneda, Provincia de Buenos Aires - Tel: (54 11) 3750-5630
Email: ventas@geagroupargentina.com.ar

ARGENTINA - ROSARIO

Sucursal Rosario - Dirección: Catamarca 1769, Rosario, Provincia de Santa Fe -
Tel: (0341) 424-0709
Email: ealtamirano@geagroupargentina.com.ar

URUGUAY - MONTEVIDEO

Casa central Uruguay - Dirección: 26 de Marzo 3380, Montevideo - Tel: +598 2622 3777
Email: nascue@pisosgeagroup.com



Refer to BRE Global ratings on www.greenbooklive.com

